




HDLA20-DCM Series

Digital Panel Meters

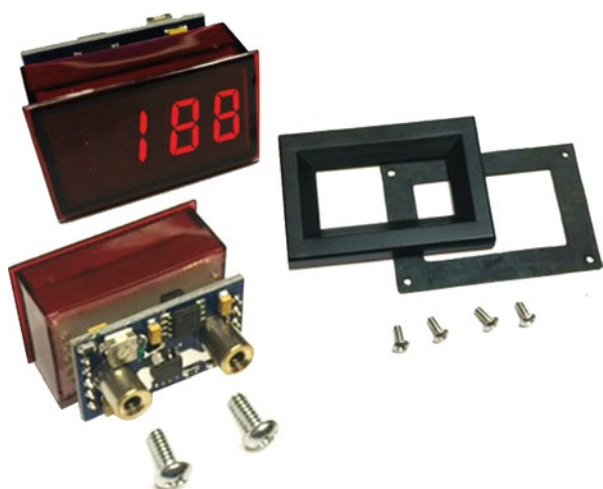

Ordering Information

<i>Part number</i>	<i>Meter color</i>	<i>Meter input</i>
HDLA20-DCM-R-0	RED	+4.50 to +19.99V
HDLA20-DCM-B-0	BLUE	+4.50 to +19.99V
HDLA20-DCM-G-0	GREEN	+4.50 to +19.99V
HDLA20-DCM-R-1	RED	+8.0 to +50.0V
HDLA20-DCM-B-1	BLUE	+8.0 to +50.0V
HDLA20-DCM-G-1	GREEN	+8.0 to +50.0V
HDLA20-DCM-R-2	RED	+30 to +264V
HDLA20-DCM-B-2	BLUE	+30 to +264V
HDLA20-DCM-G-2	GREEN	+30 to +264V

Accessories Included

HDLA-BEZ-20-G	Bezel Assembly
---------------	----------------

DLA20-DCM SERIES - Self Powered, Positive Input LED Display, DC Voltage

Features

- Screw terminals
- Available in easy to read RED, BLUE or GREEN LED
- Self Powered

Specifications

DISPLAY

Numeral Size:	.37" (9.4 mm)
Overrange:	three lower order digits blank
Supply Voltage:	self powered

INPUTS

Input Ranges:	see ordering info
---------------	-------------------

PERFORMANCE

Accuracy:	1% scale (Typ) 2% (Max)
Sampling Rate:	2.5 per second

ENVIRONMENT

Operating Temperature:	-10 to 50 °C
Max Humidity:	95% (non-condensing)

CONNECTION

2 screw terminals




HDLA20-DCM Series


Digital Panel Meters

Dimensions & Wiring


Front View

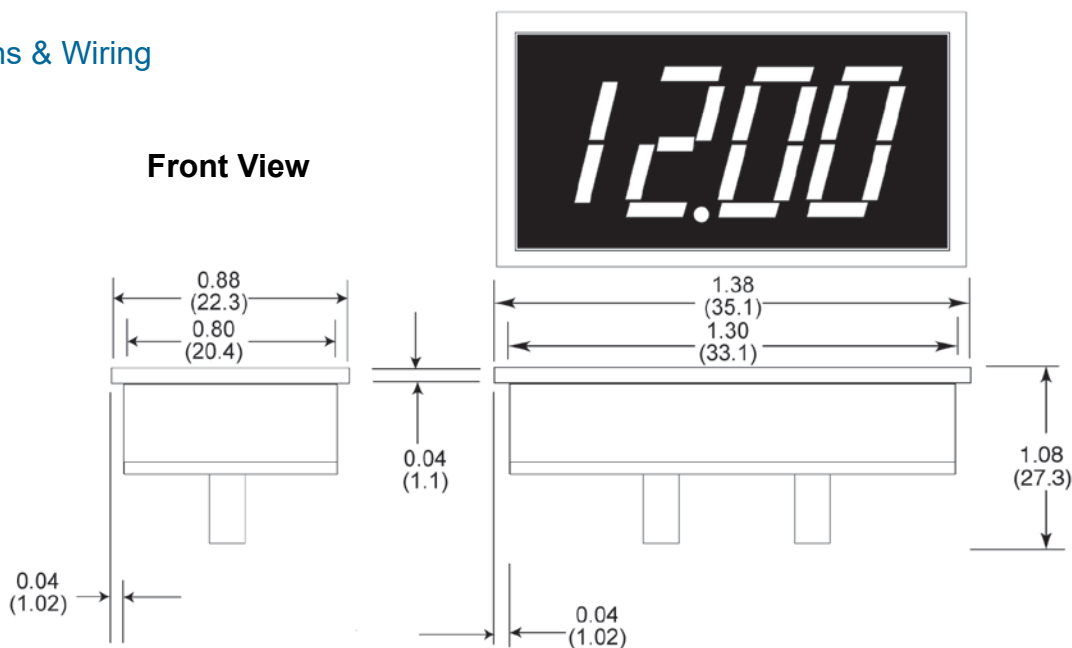

Bezel Assembly

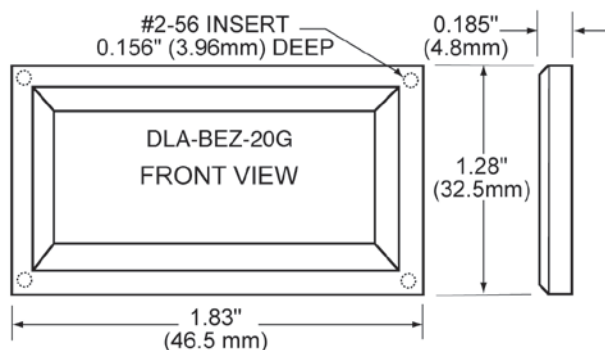

Recommended panel cut-out

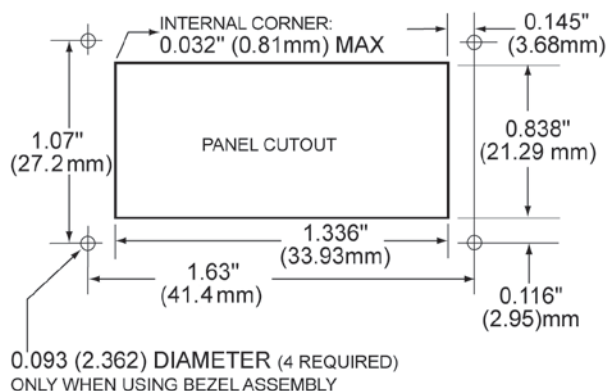

Back View

