




HDLA20-LM Series

Digital Panel Meters

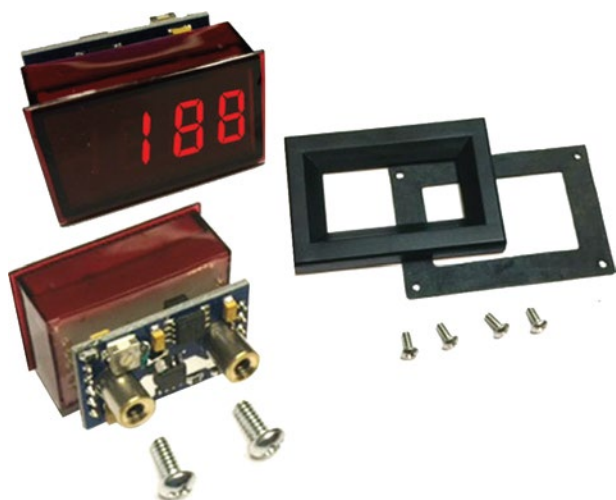

**Self Powered, 3 Digit LED Display,
AC Line Voltage**

Features

- Screw terminals
- Available in easy to read RED, BLUE or GREEN LED
- Full-wave averaging
- Self Powered

Specifications

DISPLAY

Numeral Size:	.37" (9.4 mm)
Overrange:	three lower order digits blank
Freq Range:	47-63Hz
Supply Voltage:	self powered

INPUTS

Input Ranges:	85-264Vrms
---------------	------------

PERFORMANCE

Accuracy:	±1V (Typ) ±2V (Max)
Sampling Rate:	2.5 per second
Measurement Type:	full wave averaging

ENVIRONMENT

Operating Temperature:	-10 to 50 °C
Max Humidity:	95% (non-condensing)

CONNECTION

2 screw terminals

Ordering Information


Part #	Meter Color	Meter Input
HDLA20-LM-R-1	RED	85-264Vrms
HDLA20-LM-B-1	BLUE	85-264Vrms
HDLA20-LM-G-1	GREEN	85-264Vrms

Accessories Included


HDLA-BEZ-20-G	Bezel Assembly
---------------	----------------

Dimensions


Front View

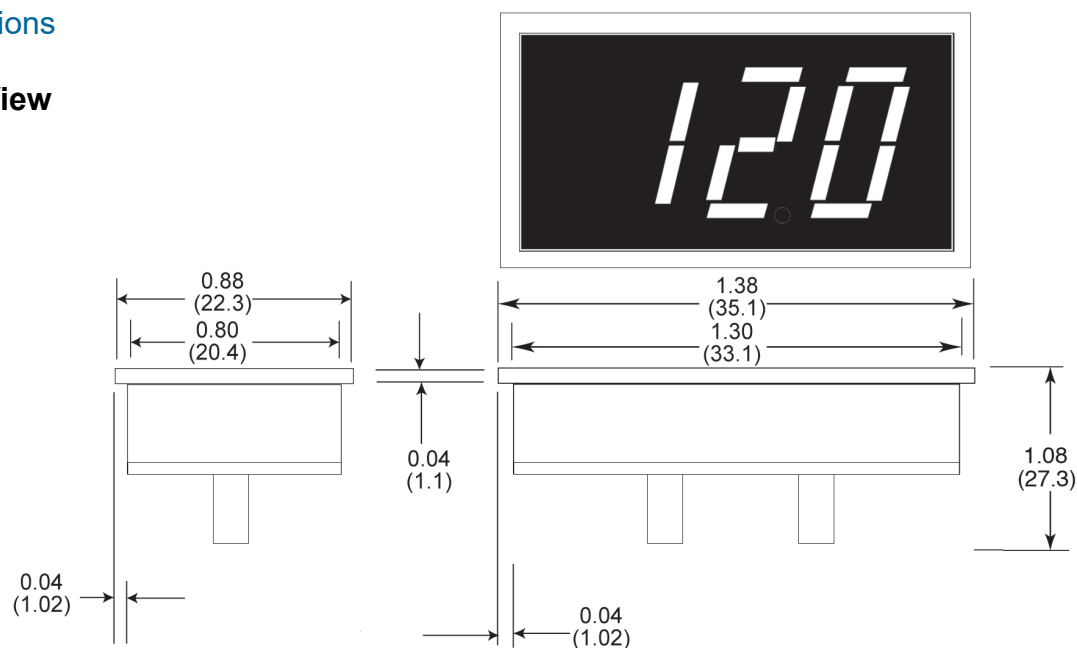

Bezel Assembly

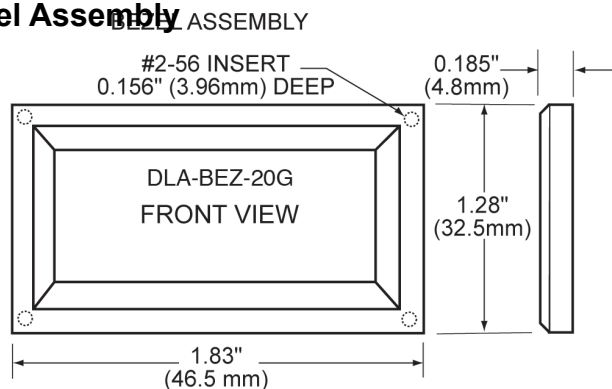

Back View

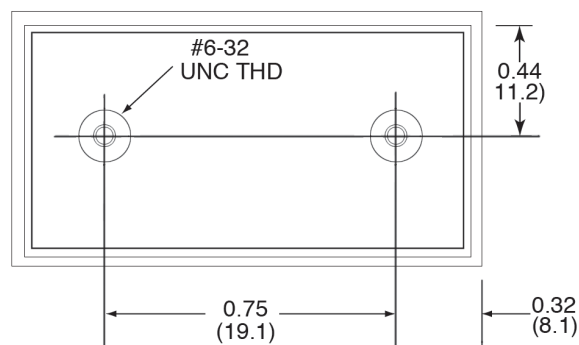

Recommended panel cut-out

