



Model 1010 CL


Rotary Scale Clamp Meters

Features

- Rotary scale which presents only one scale in windows at one time to avoid any possible reading errors.
- Pointer lock function freezes the reading in dimly lit or hard to reach places.
- Ω range ideal for checking the continuity or relays, transformers and motor coils.
- TAUT BAND movement.

Specifications

AC A:	10 / , $\pm 3\%$ of F.S.(50/60Hz)
AC V:	150 / 300 / 750V, $\pm 3\%$ of F.S.
DC V:	-----
Ω :	2k Ω , $\pm 3\%$ of Scale length.
Frequency	50 / 60Hz for ACA 10A
response:	50-400Hz for ACA 30 / 100 / 300 / 1000A
Dimensions:	227(L) $\times$ 73(W) $\times$ 33(D)mm
Conductor size:	52mm Max.
Weight:	Approx. 460g (battery Included).
Safety standard:	-----
Accessories:	Instruction manual, Test leads, Ohm test probe Soft pouch.

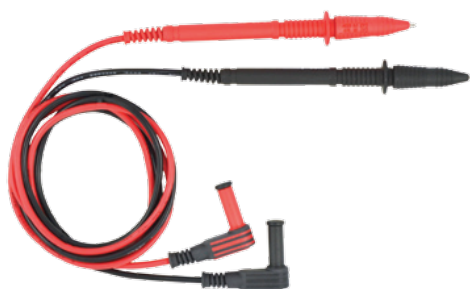

AL-24-1



CAC-3600 B