



H855 PR


H855 PR (A/B) Phase Sequence Indicator (Contact Type)

Features

- Two functions in one unit: open phase and phase sequence detection.
- Lamps let you determine at-a-glance if phase is open.
- Large size alligator clips for easy clipping onto switch-boards terminals.
- Checks a wide range of 3-phase power sources.
- Special test leads length are available on request.
- Push button switch is designed to minimize damage due to negligence.

Specifications

Voltage:	200V-600V AC
Frequency response:	50 / 60 Hz
Operating temperature & humidity:	0°C ~ 40°C at 80% Max. relative humidity
Storage temperature & humidity:	-10°C ~ 50°C at 90% Max. relative humidity
Cord:	1.1m each of red(R), white(S) and black(T) cord
Dimensions:	134(L) × 85(W) × 45(D)mm
Weight:	Approx. 530g
Safety standard:	EN 61010-1 CAT IV 600V, EN 61326-1
Accessories:	Instruction manual, Soft pouch

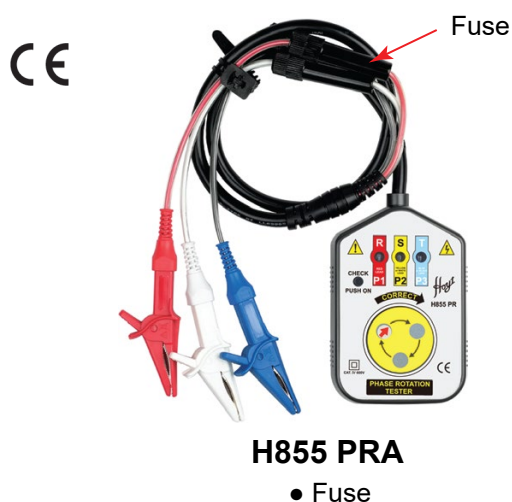

H855 PRA

- Fuse



H855 PRB

- Silicone wire 2m + Fuse + Alligator(AL-25 CA)