

Analog (Up to 10kV) Insulation Tester



Features

- Microprocessor-controlled.
- High quality Taut Band movement.
- Two insulation test voltages.
- Insulation resistance, auto ranging on all ranges.
- Low Battery LED indication.
- Beeper warning of external voltage.
- Fully protected : crow bar.
- Housed in carry case.

Specifications

Test voltage (DC V):	5000V	10000V
Measuring ranges:	0-200GΩ	0-400GΩ
Accuracy:	±5% of full scale	
Live warning:	>500V AC	
Operating temperature:	0°C to 40°C	
Operating humidity:	85% Max. relative humidity	
Dimensions:	330(L) × 260(W) × 160(D) mm	
Weight (battery included):	Approx. 3500g	
Power source:	1.5V "C" × 8 Alkaline batteries	
Accessories:	Instruction manual. Test leads. Batteries.	



AL-50




AL-30B
AL-30AG




AL-23CA B
AL-23CA R


Measuring Insulation of Open Contacts of Circuit Breaker

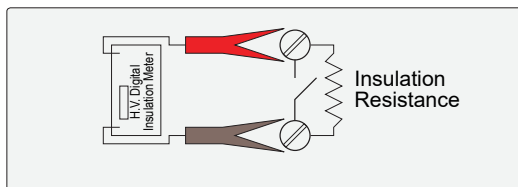

Insulator

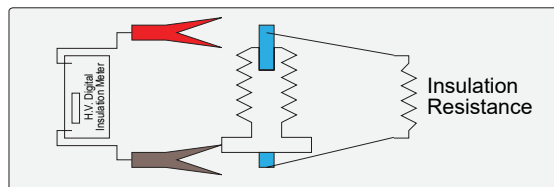

Measuring Insulation between contacts of Circuit Breaker

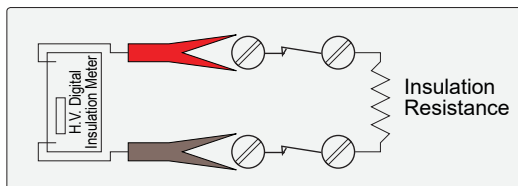

Insulator or Railway Coach

