




Features

- Rotary scale which presents only one scale in windows at one time to avoid any possible reading errors.
- Pointer lock function freezes the reading in dimly lit or hard to reach places.
- Ω range ideal for checking the continuity or relays, transformers and motor coils.

Specifications

AC A:	6 / 15 / 60 / 150 / 300A, $\pm 3\%$ of F.S.(50/60Hz)
AC V:	300 / 600V, $\pm 3\%$ of F.S.
DC V:	75V, $\pm 3\%$ of F.S.
Ω :	2k Ω , $\pm 3\%$ of Scale length.
Frequency response:	50 / 60Hz for ACA 6A 50-400Hz for ACA 15 / 60 / 150 / 300A
Dimensions:	230(L) $\times$ 72(W) $\times$ 37(D)mm
Conductor size:	38mm Max.
Weight:	Approx. 420g (battery Included).
Safety standard:	EN 61010-1 CAT II 600V. EN 61010-2-32.
Accessories:	Instruction manual, Test leads, Soft pouch.

Specifications

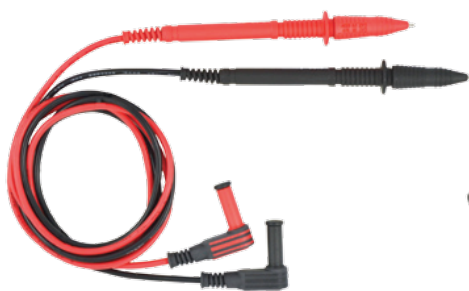

AL-24-1



CAC-600